



PRE-CUT HIPS AND VALLEYS


Ready to install, Pre-Cut Hips and Valleys designed specifically to be incorporated in 4-way slope tapered polyiso installations

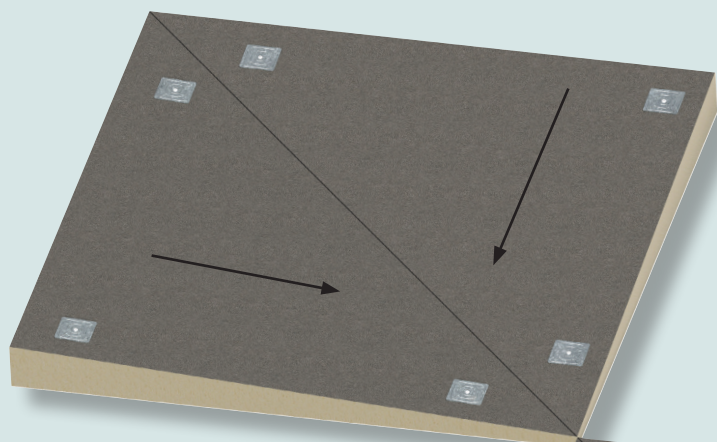

Pre-Cut Valleys

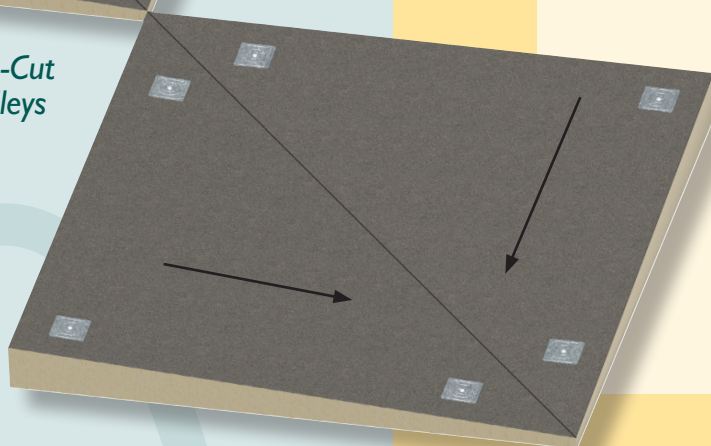


FIELD FABRICATION

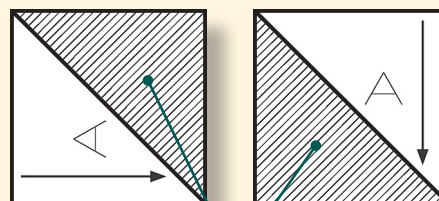

DISCARD THESE PIECES FOR A VALLEY

OR

HUNTER PANELS COMPLETED VALLEY




PRODUCT DESCRIPTION

Pre-Cut Hips (slope outward) and Pre-Cut Valleys (slope inward) are factory produced using two, 4'x4' panels of Tapered H-Shield, Tapered H-Shield CG, or Tapered H-Shield WF, cut in half at 45 degrees. Only the two halves required for installation are shipped.

FEATURES AND BENEFITS

- Shipped ready to install – no field cuts required, saves labor
- No waste, reducing material removal fees on jobsite
- Individually packaged and labeled
- Flexibility in Design and Size: Custom designed to meet your jobsite requirements including slope, minimum and maximum thicknesses. All panels AA – ZZ
- Available in all slopes



FIELD FABRICATION



DISCARD THESE PIECES FOR A HIP

OR

HUNTER PANELS COMPLETED HIP



Project Specifications:

Roof Area:

- 475 Sqrs. 1/2" min. 1/4" per ft.
- \$94,600 Tapered Quote

JUST THE HIPS & VALLEYS:

- 294 Mitered Corners = 61 sqrs material
- Equals 11,760 BF of material
- Equals 1/3 truck of material
- Equals 36 cubic yards of waste

ADVANTAGES:

- Clean factory fabricated cuts
- 1/3 truck of material less shipped to jobsite
- 1/3 truck less material hoisted, staged and moved
- Saves labor, to cut 2/3 of a truck of material
- Waste savings: approx 11,760 BF = 36 cubic yards
- \$ Savings

FIELD FABRICATED MITERS:

Standard Tapered Product Quote:	\$94,600.00
Hoist, stage and move 1/3 truck of material – 2 Man-hours	\$100.00 *
Labor to field cut Hips & Valleys – 62 Man-hours	\$3,100.00 *
Waste removal: 36 cubic yards	\$ 800.00
Field fabricated costs total	\$4,000.00

TOTAL COST FOR FIELD FABRICATED PRODUCT: \$98,600.00


* using \$50.00/Man-hour as benchmark

PRECUT FABRICATED MITERS:

Standard Tapered Product Quote	\$94,600.00
Pre-Cut Miters additional cost	\$1,400.00

TOTAL COST FOR READY TO INSTALL PRODUCT : \$96,000.00

\$2600 cost savings

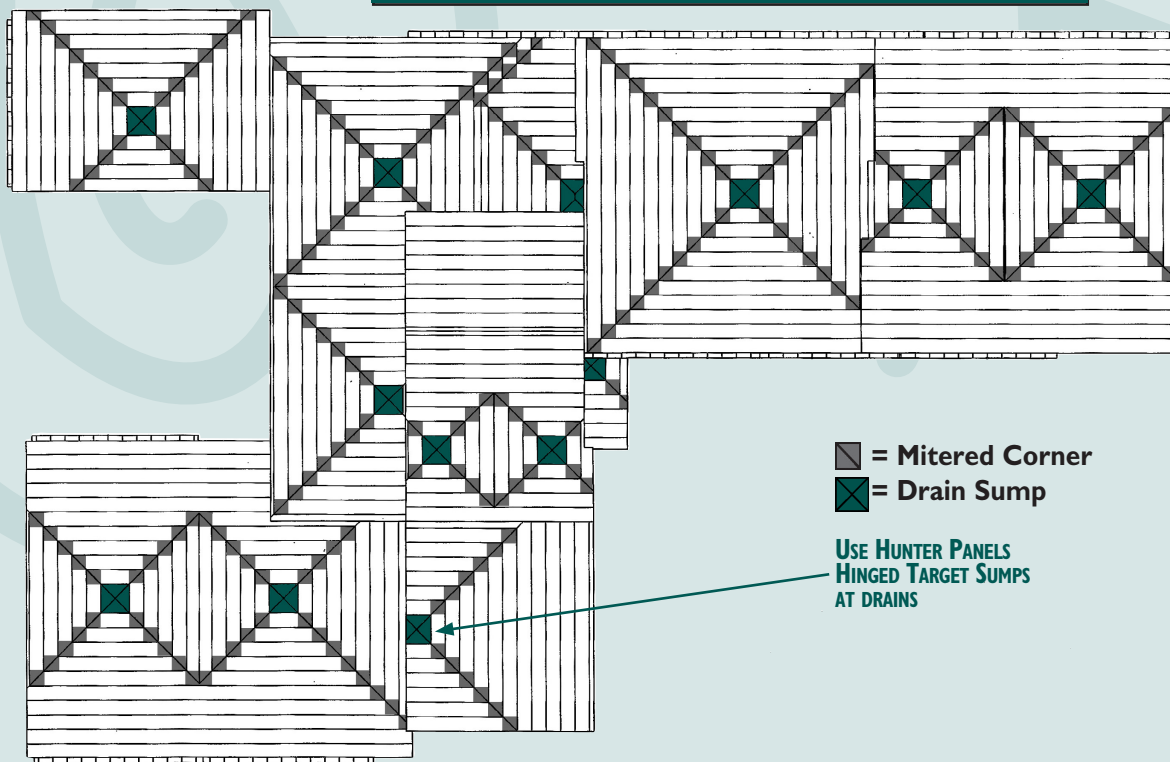

HUNTER
Energy Smart Polyiso
HUNTERPANELS.COM

15 FRANKLIN STREET, PORTLAND, ME 04101 • 888.746.1114 • FAX: 877.775.1769

