

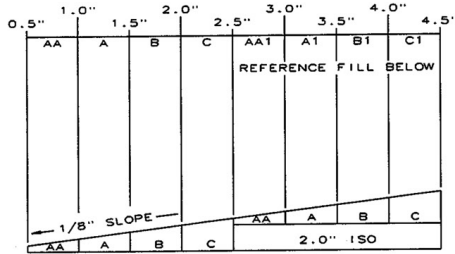




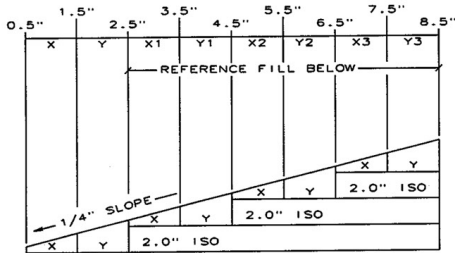


Use Hunter's Extended Panel Tapered Systems

STANDARD PANEL REPEATS

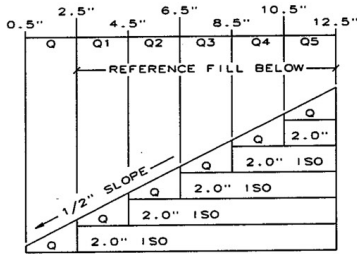

EXTENDED PANEL REPEATS

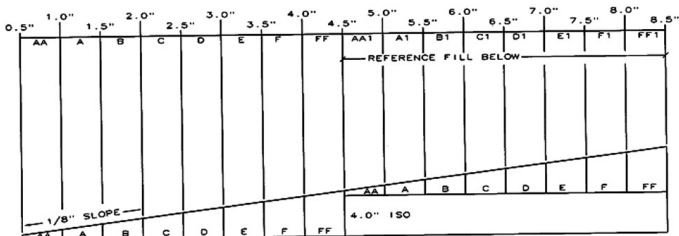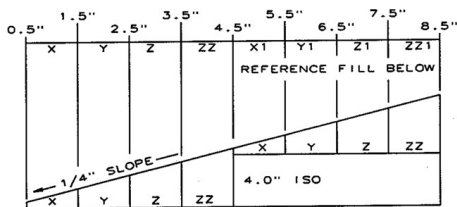

- Reduces Labor and Handling
- Reduces "Fill" Panels
- Reduces Volume of Adhesives or Hot Asphalt

THE PRODUCTS:

- Tapered H-Shield
- Tapered H-Shield CG - premium performance coated fiberglass facer, for cold applied and spray applied applications
- Tapered H-Shield WF - wood fiberboard, designed specifically for BUR, Modified Bitumen systems
- D, E, F, FF, Z, ZZ and QQ are the extended panels and are available in Tapered H-Shield and Tapered H-Shield CG

SALES BENEFITS:

- Single Source Responsibility – Tapered Design by manufacturer
- More design options to fit your budget and building requirements
- Contact us for Architectural and or Owner Presentations
- Over 40 years of Tapered Design expertise
- On-line Tapered Quote Request Form – ability to upload submittals and drawings via our website www.hpanels.com
- E-Sign-Off on drawings



HUNTER

Energy Smart Polyiso

888-746-1114

15 FRANKLIN STREET, PORTLAND, ME 04101 FAX: 877-775-1769

MANUFACTURING FACILITIES:

- NEW YORK
- ILLINOIS
- FLORIDA
- TEXAS
- UTAH
- PENNSYLVANIA
- WASHINGTON

WWW.HUNTERPANELS.COM

Project Specifications:

Roof Area 475 squares
Tapered Insulation Slope 1/4" per foot
1/2" minimum at drains - 13" high point

STANDARD PANEL SYSTEM:

Standard Panel Repeat:
 X, Y, 2"
 2" Fill Required – 1013 squares

STANDARD COST: \$94,600

Adhesive and Labor Costs: \$40,520
 (1013 squares of fill x \$40*)

\$ 94,600
 \$ 40,520

\$ 135,120 materials

EXTENDED PANEL SYSTEM:

Extended Panel Repeat:
 X, Y, Z, ZZ, 4"
 4" Fill Required – 402 squares

EXTENDED COST: \$100,800

Adhesive and Labor Costs: \$16,080
 (402 Squares of fill x \$40*)

\$ 100,800
 \$ 16,080

\$ 116,880 materials

SAVINGS OF \$18,240
(this does not include other labor and handling savings)

**When the Tapered Insulation System is being applied in a cold adhesive we have estimated the adhesive and labor costs at approximately \$40 per square.*

