


ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 286 PSF (HORIZONTAL)

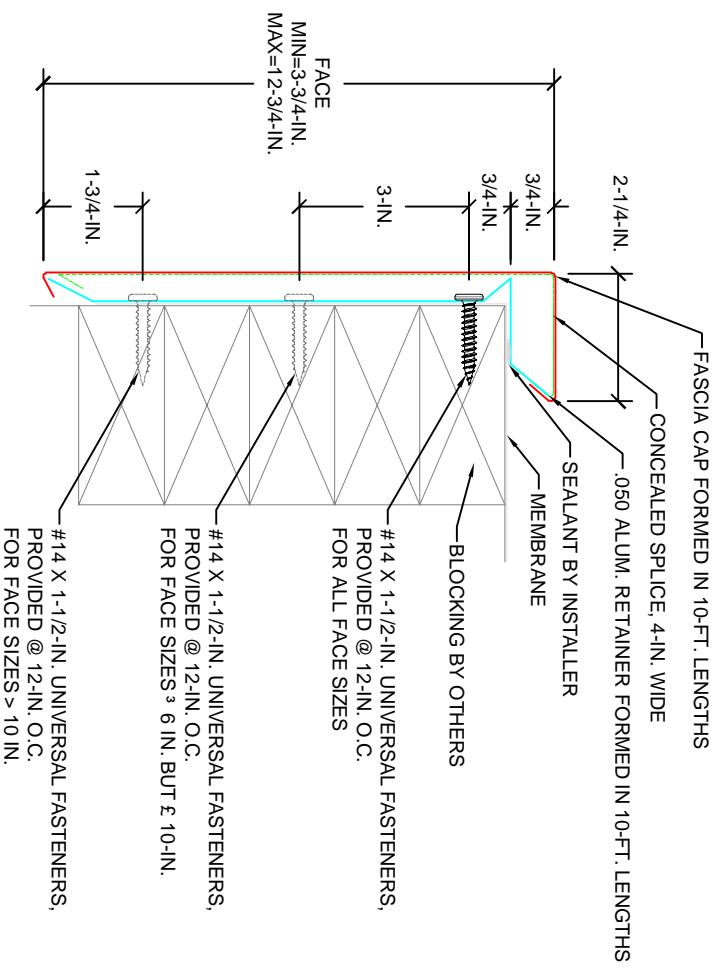

PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.  
CONTACT GAF FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED  
ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPLICATIONS  
SINGLE-PLY MEMBRANES

SIZES:

SEE DRAWING


NOTES:

- 1- PRODUCT TO BE INSTALLED IN STRICT ACCORDANCE WITH GAF PRINTED INSTRUCTIONS.
- 2- TESTED IN ACCORDANCE WITH ANSI/SPRI/FM4435/ES-1.

ANSI/SPRI/FM4435/ES-1 TESTED



Approved

		EVERGUARD EZ FASCIA AR	
		MANU. BY: KCP	DATE: 04/30/2020
APPR. BY: JH	DATE: 04/30/2020	SCALE: NOT TO SCALE	SHEET: 1 OF 1